

INSTALLING REPLACEMENT HEAD LIGHT LENSES



1999-2001 VEHICLES:

Press down retainer ① through bore in side panel and slide turn signal lamp towards front.



2002-2006 VEHICLES:


Loosen screw (1).

Installation:

Note:

Secure front turn signal lamp ② against falling out.

Slide out front turn signal lamp ② in direct of arrow.

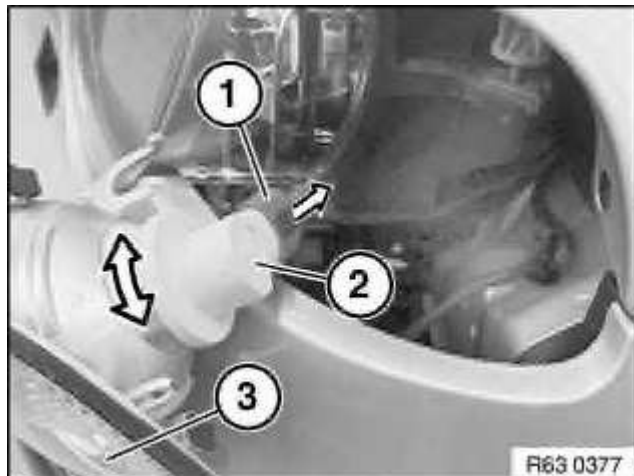

Disconnect plug connection ①.

Turn signal lamp, front left:

To release, turn bulb holder ② clockwise.

Turn signal lamp, front right:

To release, turn bulb holder ②


counterclockwise.

Turn bulb holder ② and remove turn signal lamp ③.


Make sure seal is correctly seated between bulb holder ② and turn signal lamp ③.




Unclip cover strip from outside to inside.

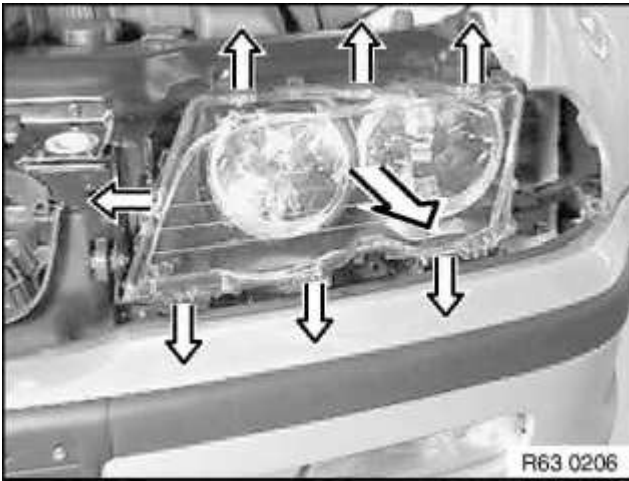

Unclip all retainers.
Remove lens cover.
Installation:

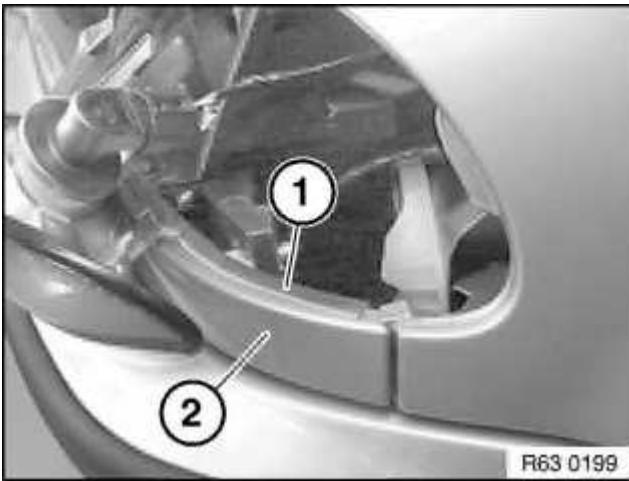


Installation:
Make sure bonded rubber seal ① is correctly
seated on trim ②.

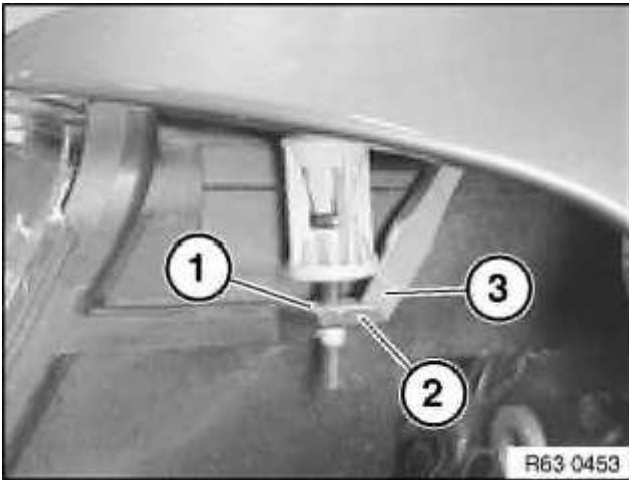

Installation:

Make sure nut ① is correctly seated on headlight housing ②.

If necessary, when screwing front turn signal lamp into place, secure nut ① with screwdriver ③ against turning.

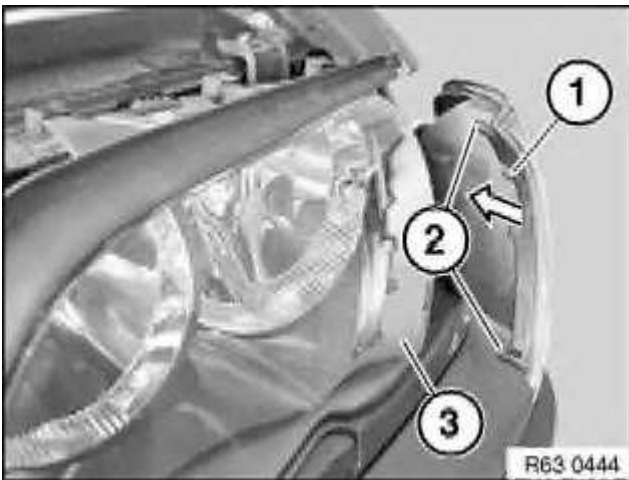

Installation:

When sliding in front turn signal lamp ①, make sure guides ② are correctly seated in headlight mounts ③.

Make sure bonded seal is correctly seated under front turn signal lamp ①.