

### MOUNTING LOCATION:

Right side of radio and screen display

### CELL PHONE & MEDIA MOUNT INSTALLATION INSTRUCTIONS

### \*\* ADVISEMENT \*\*

Read instructions completely prior to starting installation. All InDash Mounts are designed so that after installation, phone is facing normal driver position for left-hand drive vehicles. This mount is not designed to be used in foreign countries with right-hand drive vehicles. Use extreme care when working around the plastic components on the dash. Excess force, can cause breakage of the plastic components.

### TOOLS REQUIRED:


Phillips stub & regular screwdriver  
5/16 socket  
1/4 drive ratchet  
T20 Torx wrench

PART#: 75103-295  
MFG: BMW  
MODELS & YEARS:  
740IL 95-2001

### HARDWARE INCLUDED:

(1) E - #8X1.0" Needle Point Screw

- STEP #1 Open the glove compartment. Inside you will remove (3) Phillips head screws which hold the upper panel; once removed, this panel will drop. DO NOT REMOVE COMPLETELY.
- STEP #2 Remove a wooden finish trim strip located just below the air bag and right side air vent, by removing (4,5 for 2001) knurl cone-shaped nuts installed from the back of the trim strip. Access these nuts by pulling down the panel that was dropped in STEP #1 and placing your hand through the opening to remove them. It may be necessary to use a 5/16 socket to loosen the nuts. Also to facilitate removal of strip it may be necessary to remove dash colored strip below wood grain strip by removing (4) of the same type nuts. After removing, pull the trim strip(s) out and set it aside.
- STEP #3 Remove (2) screws located to the right of the DSP/Screen; one is a Torx head and the second one is a Phillips head screw.
- STEP #4 Attach phone holder to InDash Mount. If using a PortaGrip holder adjust it to the size of the phone prior to mounting.
- STEP #5 Insert the InDash Mount between the side panel screw hole and the bracket which holds the sound components in place. The small hole of the InDash Mount will line up with the vertical screw hole where the Torx head screw was removed. Reinstall the Phillips screw and replace the Torx head screw with the supplied 1" screw (this will secure the InDash Mount, the radio flange and the metal bracket all together).
- STEP #6 Reassemble in reverse order.

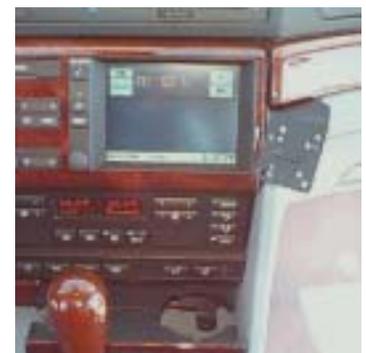

INSTALLATION IS NOW COMPLETE.  
ENJOY YOUR NEW PANAVISE INDASH MOUNT.



06-09-03